

## 30" & 27" DOUBLE ELECTRIC WALL OVENS

30" Models	PLEB30T9DC	GLEB30T9D	FEB30T7DC	FEB30T6DC	FEB30T6D	FEB30T5DC	FEB30T5D
Series	Professional	Gallery	Frigidaire	Frigidaire	Frigidaire	Frigidaire	Frigidaire
Nominal Cabinet Size / Configuration	30" Double	30" Double	30" Double	30" Double	30" Double	30" Double	30" Double
<b>Oven Features</b>							
Convection Cooking System	EvenCook™ (Both)	EvenCook™ (Both)	SpeedBake® (Both)	SpeedBake® (Both)	SpeedBake® (Both)		
Self-Cleaning Oven with Auto-Latch™ Safety Lock	Both	Both	Both	Both	Both	Both	Both
Speed Clean	Both	Both	Both	Both	Both		
Maxx Clean™	Both	Both					
Dual Radiant™ Baking and Roasting System	Both	Both	Both	Both	Both	Both	Both
Six-Pass Element with Vari-Broil™	400°-550° (Both)	400°-550° (Both)	400°-550° (Both)	400°-550° (Both)	400°-550° (Both)	400°-550° (Both)	400°-550° (Both)
Hidden Bake Element	Both	Both					
Interior Oven Light (Automatic & Switched)	2 (Both)	2 (Both)	1 (Both)	1 (Both)	1 (Both)	1 (Both)	1 (Both)
Porcelain Broiler Pan with Grill	*	*	*	*	*	*	*
Oven Racks (# per Cavity)	3 Heavy Duty	3 Heavy Duty	2	2	2	2	2
Convection Roasting Rack	*	*					
Removable Oven Door	*	*	*	*	*	*	*
<b>Control Panel Features</b>							
Electronic Clock / Timer / Temperature Display	*	*	*	*	*	*	*
Automatic Oven (Delay, Cook & Off)	*	*	*	*	*	*	*
Automatic Oven Shut-Off (12 hour)	*	*	*	*	*	*	*
F° or C° Programmable	*	*	*	*	*	*	*
Integrated Oven Light (Touch Pad)	*	*	*	*	*	*	*
Sabbath Mode (Star-K Certified)	*	*	*	*	*	*	*
<b>Oven Style</b>							
Color	Stainless Steel	Color	Stainless Steel	Stainless Steel	Color	Black	Color
Visualite® Window	Extra-Large (Both)	Large (Both)	Extra-Large (Both)	Extra-Large (Both)	Large (Both)	Extra-Large (Both)	Large (Both)
Door	Stainless Steel (Both)	Color/Glass (Both)	Stainless Steel (Both)	Stainless Steel (Both)	Color/Glass (Both)	Stainless Steel (Both)	Color/Glass (Both)
Handle	Stainless Steel (Both)	Color (Both)	Stainless Steel (Both)	Black (Both)	Color (Both)	Black (Both)	Color (Both)
<b>Color/UPC (0-57112-)</b>							
Stainless Steel (C)	08693-4		08689-7	08688-0		08684-2	
White-on-White (S)		08690-3			08685-9		08682-8
Bisque-on-Bisque (Q)		08691-0			08686-6		
Black-on-Black (B)		08692-7			08687-3		08683-5
<b>Specifications</b>							
Interior Oven Dimensions - Width	24-1/8"	24-1/8"	24-1/8"	24-1/8"	24-1/8"	24-1/8"	24-1/8"
Interior Oven Dimensions - Height	16-1/2"	16-1/2"	16-1/2"	16-1/2"	16-1/2"	16-1/2"	16-1/2"
Interior Oven Dimensions - Depth	18-1/32"	18-1/32"	18-1/32"	18-1/32"	18-1/32"	18-1/32"	18-1/32"
Oven Capacity	4.2 Cu. Ft. (Both)	4.2 Cu. Ft. (Both)	4.2 Cu. Ft. (Both)	4.2 Cu. Ft. (Both)	4.2 Cu. Ft. (Both)	4.2 Cu. Ft. (Both)	4.2 Cu. Ft. (Both)
Shipping Weight	257 Lbs.	240 Lbs.	257 Lbs.	264 Lbs.	200 Lbs.	266 Lbs.	262 Lbs.
Connected Load (kW Rating) 240/208 Volts	6.9 / 5.2	6.9 / 5.2	6.9 / 5.2	6.9 / 5.2	6.9 / 5.2	6.9 / 5.2	6.9 / 5.2
Amps @ 240/208	28.3 / 25	28.3 / 25	28.3 / 25	28.3 / 25	28.3 / 25	28.3 / 25	28.3 / 25
Minimum Circuit Required - Amps*	40	40	40	40	40	40	40
Bake Element Wattage 240/208 Volts	3400 / 2554	3400 / 2554	3400 / 2554	3400 / 2554	3400 / 2554	3400 / 2554	3400 / 2554
Broil Element Wattage 240/208 Volts	2750 / 2065	2750 / 2065	2750 / 2065	2750 / 2065	2750 / 2065	2750 / 2065	2750 / 2065
Armored Electrical Cable	*	*	*	*	*	*	*
<b>27" Models</b>							
Series	Professional	Gallery	Frigidaire	Frigidaire	Frigidaire	Frigidaire	Frigidaire
Nominal Cabinet Size / Configuration	27" Double	27" Double	27" Double	27" Double	27" Double	27" Double	27" Double
<b>Oven Features</b>							
Convection Cooking System	EvenCook™ (Both)	EvenCook™ (Both)	SpeedBake® (Both)	SpeedBake® (Both)	SpeedBake® (Both)		
Self-Cleaning Oven with Auto-Latch™ Safety Lock	Both	Both	Both	Both	Both	Both	Both
Speed Clean	Both	Both	Both	Both	Both		
Maxx Clean™	Both	Both					
Dual Radiant™ Baking and Roasting System	Both	Both	Both	Both	Both	Both	Both
Six-Pass Element with Vari-Broil™	400°-550° (Both)	400°-550° (Both)	400°-550° (Both)	400°-550° (Both)	400°-550° (Both)	400°-550° (Both)	400°-550° (Both)
Hidden Bake Element	Both	Both					
Interior Oven Light (Automatic & Switched)	2 (Both)	2 (Both)	1 (Both)	1 (Both)	1 (Both)	1 (Both)	1 (Both)
Porcelain Broiler Pan with Grill	*	*	*	*	*	*	*
Oven Racks (# per Cavity)	3 Heavy Duty	3 Heavy Duty	2	2	2	2	2
Convection Roasting Rack	*	*					
Removable Oven Door	*	*	*	*	*	*	*
<b>Control Panel Features</b>							
Electronic Clock / Timer / Temperature Display	*	*	*	*	*	*	*
Automatic Oven (Delay, Cook & Off)	*	*	*	*	*	*	*
Automatic Oven Shut-Off (12 hour)	*	*	*	*	*	*	*
F° or C° Programmable	*	*	*	*	*	*	*
Integrated Oven Light (Touch Pad)	*	*	*	*	*	*	*
Sabbath Mode (Star-K Certified)	*	*	*	*	*	*	*
<b>Oven Style</b>							
Color	Stainless Steel	Color	Stainless Steel	Stainless Steel	Color	Black	Color
Visualite® Window	Extra-Large (Both)	Large (Both)	Extra-Large (Both)	Extra-Large (Both)	Large (Both)	Extra-Large (Both)	Large (Both)
Door	Stainless Steel (Both)	Color/Glass (Both)	Stainless Steel (Both)	Stainless Steel (Both)	Color/Glass (Both)	Stainless Steel (Both)	Color/Glass (Both)
Handle	Stainless Steel (Both)	Color (Both)	Stainless Steel (Both)	Black (Both)	Color (Both)	Black (Both)	Color (Both)
<b>Color/UPC (0-57112-)</b>							
Stainless Steel (C)	08681-1		08677-4	08676-7		08672-9	
White-on-White (S)		08678-1			08673-6		08670-5
Bisque-on-Bisque (Q)		08679-8			08674-3		
Black-on-Black (B)		08680-4			08675-0		08671-2
<b>Specifications</b>							
Interior Oven Dimensions - Width	20-1/2"	20-1/2"	20-1/2"	20-1/2"	20-1/2"	20-1/2"	20-1/2"
Interior Oven Dimensions - Height	16-1/2"	16-1/2"	16-1/2"	16-1/2"	16-1/2"	16-1/2"	16-1/2"
Interior Oven Dimensions - Depth	18-1/32"	18-1/32"	18-1/32"	18-1/32"	18-1/32"	18-1/32"	18-1/32"
Oven Capacity	3.5 Cu. Ft. (Both)	3.5 Cu. Ft. (Both)	3.5 Cu. Ft. (Both)	3.5 Cu. Ft. (Both)	3.5 Cu. Ft. (Both)	3.5 Cu. Ft. (Both)	3.5 Cu. Ft. (Both)
Shipping Weight (Approx.)	235 Lbs.	200 Lbs.	200 Lbs.	200 Lbs.	200 Lbs.	200 Lbs.	200 Lbs.
Connected Load (kW Rating) 240/208 Volts	6.9 / 5.2	6.9 / 5.2	6.9 / 5.2	6.9 / 5.2	6.9 / 5.2	6.9 / 5.2	6.9 / 5.2
Amps @ 240/208 (Approx.)*	28.3 / 25	28.3 / 25	28.3 / 25	28.3 / 25	28.3 / 25	28.3 / 25	28.3 / 25
Minimum Circuit Required - Amps*	40	40	40	40	40	40	40
Bake Element Wattage 240/208 Volts	2700 / 2028	2700 / 2028	2300 / 1727	2300 / 1727	2300 / 1727	2300 / 1727	2300 / 1727
Broil Element Wattage 240/208 Volts	3400 / 2554	3400 / 2554	3400 / 2554	3400 / 2554	3400 / 2554	3400 / 2554	3400 / 2554
Armored Electrical Cable	*	*	*	*	*	*	*

\* Consult Local/National Electric Codes

Specifications subject to change.

## 27" SIDE-SWING DOOR SINGLE ELECTRIC WALL OVEN


Model	GLEB27S7C
Series	Gallery
Nominal Cabinet Size / Configuration	27" Single
<b>Oven Features</b>	
Convection Cooking System	SpeedBake®
Self-Cleaning Oven with Auto-Latch™ Safety Lock	•
Dual Radiant™ Baking and Roasting System	•
Six-Pass Element with Vari-Broil™ (# Temperatures)	6
Interior Oven Light (Automatic & Switched)	1
Porcelain Broiler Pan with Grill	•
Oven Racks (# per Cavity)	3 Heavy Duty
Convection Roasting Rack	•
Reversible (Side-Swing) Oven Door	•
<b>Control Panel Features</b>	
Electronic Clock / Timer / Temperature Display	•
Automatic Oven (Delay, Cook & Off)	•
Automatic Oven Shut-Off (12 hour)	•
F° or C° Programmable	•
Integrated Oven Light (Touch Pad)	•
Sabbath Mode	•
<b>Door Style</b>	
Visualite® Window	Large
Door	Color / Glass
Handle	Color
<b>Color / UPC (0-571 12-)</b>	
White-on-White (S)	08389-6
Black-on-Black (B)	08390-2
<b>Specifications</b>	
Interior Oven Dimensions - Width	20"
Interior Oven Dimensions - Height	16"
Interior Oven Dimensions - Depth	18-1/2"
Oven Capacity	3.4 Cu. Ft.
Under-Counter Installation	•
Shipping Weight (Approx.)	125 Lbs.
Connected Load (kW Rating) 240 / 208 Volts	3.4 / 2.6
Amps @ 240 / 208 (Approx.)*	11.3 / 10.0
Minimum Circuit Required - Amps*	30
Bake Element Wattage 240 / 208 Volts	2300 / 1727
Broil Element Wattage 240 / 208 Volts	3400 / 2554
Armored Electrical Cable	•

## DOUBLE & SINGLE ELECTRIC WALL OVEN INSTALLATION

The following dimension and cutout information is for planning purposes only. For complete installation details consult manual packed with product, or download manual at Customer Service, online at [www.frigidaire.com](http://www.frigidaire.com).


### Double Oven Models

(Refer to dimensions chart on opposite page.)

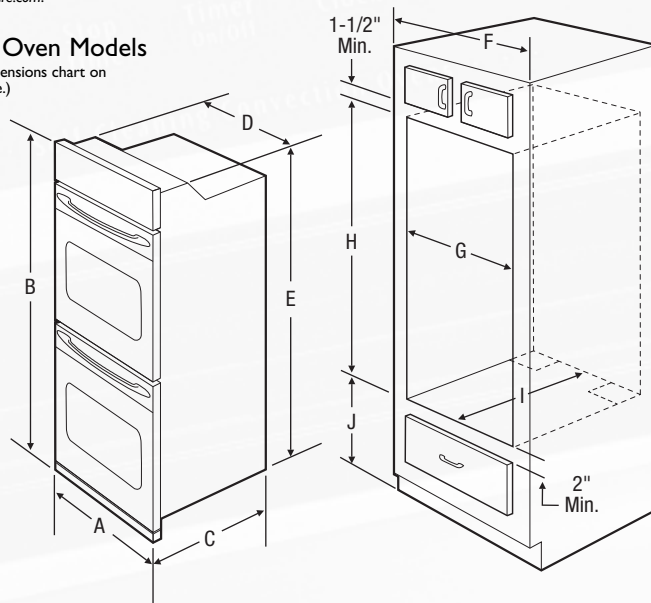

### Single Oven Models

(Refer to dimensions chart on opposite page.)

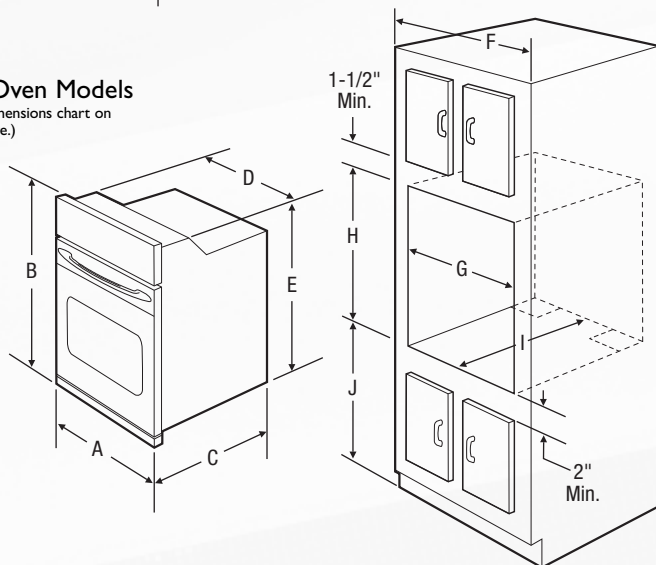

## 24" SINGLE ELECTRIC WALL OVENS

Models	FEB24S5A	FEB24S2A
Series	Frigidaire	Frigidaire
Nominal Cabinet Size / Configuration	24" Single	24" Single
<b>Oven Features</b>		
Self-Cleaning Oven with Auto-Latch™ Safety Lock	•	•
Manual-Clean Oven	•	•
Dual Radiant™ Baking and Roasting System	•	•
Six-Pass Element with Vari-Broil™	Hi/Low	•
Interior Oven Light (Automatic & Switched)	1	1
Porcelain Broiler Pan with Grill	•	•
Oven Racks (# per Cavity)	2	2
Removable Oven Door	•	•
<b>Control Panel Features</b>		
Electronic Clock / Timer / Temperature Display	•	•
Automatic Oven (Delay, Cook & Off)	•	•
Automatic Oven Shut-Off (12 hour)	•	•
F° or C° Programmable	•	•
Sabbath Mode	•	•
<b>Door Style</b>		
Visualite® Window	•	•
Door	Color / Glass	Color / Glass
Handle	Color	Color
<b>Color / UPC (0-571 12-)</b>		
White-on-White (S)	08068-0	08071-0
Bisque-on-Bisque (Q)	08079-6	•
Black-on-Black (B)	08070-3	08072-7
<b>Specifications</b>		
Interior Oven Dimensions - Width	17"	18-1/2"
Interior Oven Dimensions - Height	16"	16"
Interior Oven Dimensions - Depth	18-1/2"	18-1/2"
Oven Capacity	2.9 Cu. Ft.	3.1 Cu. Ft.
Shipping Weight	114 Lbs.	99 Lbs.
Connected Load (kW Rating) 240 / 208 Volts	3.4 / 2.6	3.4 / 2.6
Amps @ 240 / 208	14.5 / 12.5	14.5 / 12.5
Minimum Circuit Required - Amps*	30	30
Bake Element Wattage 240 / 208 Volts	2100 / 1577	2100 / 1577
Broil Element Wattage 240 / 208 Volts	34000 / 2554	34000 / 2554
Armored Electrical Cable	•	•

\*Consult Local / National Electric Codes

White

Black

Bisque

### Installation Notes:

#### Existing Cabinet Cutout Installation –

It is also possible to install Frigidaire® wall ovens into existing cabinet cutouts with openings greater than dimensions specified in chart on opposite page.

#### Wall Oven Model (to be installed)

30" or 27" Double  
30" Double  
30" or 27" Single  
30" Single  
27" Single (Side-Swing Model Only)

#### Existing Cutout Height (if greater than)

49-1/2"  
49-7/8"  
28-1/8"  
28-5/8"  
29"

For complete installation details on this procedure consult manual packed with product, or download manual at Customer Service, online at [www.frigidaire.com](http://www.frigidaire.com).

#### Oven Base Support –

- Double wall oven base must be capable of supporting 300 lbs.
- Single wall oven base must be capable of supporting 150 lbs.

#### Oven Door Swing Clearances –

- 30" & 27" Down-Swing Door – Allow 21"
- 24" Down-Swing Door – Allow 19-3/8"
- 27" Side-Swing Door – Allow 27-1/4" and minimum of 4-1/2" from any obstruction on hinged side of door.