



Color Variants

BO480610  
Stainless steel-backed full glass door  
Width 30" (76 cm)

Included accessories

1 x enamel baking tray.  
suit. pyrol. clean..  
1 x rotary spit.  
1 x grill shelf.  
1 x grill tub with grid.  
1 x pluggable meat probe.

Optional accessories

BA018103  
Pull-out system  
BA028113  
Baking tray, enameled  
BA038103  
Wire rack, chromium-plated  
BA058113  
Heating element for baking stone and  
cast-iron roaster  
BA058133  
Baking stone  
BS020002  
Pizza peel, additional set of 2  
GN340230  
Non-stick aluminum cast-iron roaster

Product Variants

BO481610  
400 series single oven  
Stainless steel-backed full glass door  
Width 30" (76 cm)  
Left-hinged  
controls on top

BO480610  
400 series single oven  
Stainless steel-backed full glass door  
Width 30" (76 cm)  
Right-hinged  
controls on top

Handleless door / automatic door  
opening  
Pyrolytic self-cleaning  
Universal heating system with 17  
heating modes, with meat probe,  
rotisserie spit and baking stone  
operation  
TFT touch display  
Electronic precision temperature  
control from 85° F - 550° F.  
4.5 cu.ft. net volume

Cooking modes

Convection.  
Economy convection.  
Top + bottom heat.  
Top + 1/3 bottom heat.  
Top heat.  
1/3 top + bottom heat.  
Bottom heat.  
Convection + bottom heat.  
Convection + 1/3 bottom heat.  
Convection broiling.  
Broiling.  
Compact grill.  
Baking stone operation.  
Roaster function.  
Dough proofing.  
Defrosting.  
Keeping warm.

Operation

Automatic door opening.  
Rotary knobs and TFT touch display  
operation.  
Clear text display in 25 languages.  
Option to save indiidual recipes (incl.  
meat probe)  
Information key with use indicators.  
Side-opening door opens up to 180°  
angle.

Features

Meat probe with automatic shut-off.  
Rotisserie spit.  
Baking stone outlet.  
Actual temperature display.  
Super-quick preheating.  
Timer functions: cooking time, switch-  
off time, short-term timer, stopwatch,  
Sabbath mode.  
60 W halogen top light.  
2 x 10 W halogen light on the side.  
Enamel wire racks on the sidewalls with  
5 rack levels, pyrolytic-safe.

Safety

Thermally insulated door with  
quadruple glazing.  
Child lock.  
Safety lock.  
Cooled housing with temperature  
protection.

Cleaning

Pyrolytic self-cleaning.  
Gaggenau Clean-Enamel.  
Heated air cleaning catalyst.

Planning notes

Door hinge not reversible.  
The front of the appliance extends 1  
7/8" from the cabinet front.  
When handle (optional accessory) is  
installed, the outer edge of the door  
handle extends 3 11/16" (94mm) from  
the cabinet front.  
Consider the overhang, incl. the  
door handle where applicable, when  
planning to open drawers next to the  
appliance. Plan a gap of at least 3/16"  
between the appliance and adjacent  
cabinets.

Product Features

Cooking method primary cavity  
Baking stone function, Bottom  
heat, Bottom heating, 1/3 top heat.,  
Conventional heat, Defrost, Dough  
proving setting, Full width grill, Half  
width grill, Hot Air, Hot air and 1/1  
bottom heating, Hot air and 1/3 bottom  
heating, Hot Air-Eco, Hot air grilling,  
Roaster function, Top heat, Top heating,  
1/3 bottom heat., warming

Cleaning system - primary cavity  
Self Clean

Interior Lights - primary cavity  
3

Pull-out system

Accessory

Timer settings

Alarm, Off, On, timer

Included accessories

1 x enamel baking tray, suit. pyrol.  
clean., 1 x rotary spit, 1 x grill shelf, 1 x  
grill tub with grid, 1 x pluggable meat  
probe

Bake Element Wattages primary cavity  
(W)  
1700

Broil Element Wattages primary cavity  
(W)  
3900

Convection Element Wattages primary  
cavity (W)  
1900

Microwave Wattages (W)

Drawer wattage (W)

Consumption and connection features

UPC code  
825225802846

Product color  
Stainless steel

Alternative colors available

Energy source  
Electric

Watts (W)  
5520

Current (A)  
25

Volts (V)  
208/220-240

Frequency (Hz)  
60

Approval certificates  
ETL

Power Cord Length  
47 1/4

Plug type  
fixed connection

Required cutout size (HxWxD) (in)  
26 3/16 " x 28 1/2 " x 21 11/16 "

Product packaging dimensions  
(HxWxD) (in)  
33.85 x 33.46 x 29.92

Net weight (lbs)  
173

Gross weight (lbs)  
187

2015-02-03  
Page 1


When planning a corner solution, pay  
attention to the 90° door opening  
angle.

To achieve the 21 5/8" installation  
depth, the connecting cable needs to  
follow the slanted edge on the lower  
right hand corner of the housing.  
The electrical outlet needs to be  
planned outside the cut-out niche.

Rating

Total rating 5.5 kW.  
Total Amps: 25 A.  
208 / 220 - 240 V / 60 Hz  
Connecting cable 47 1/4 without plug  
(hardware required).

BO480610
400 series single oven
Stainless steel-backed full glass door
Width 30" (76 cm)
Right-hinged controls on top
2015-02-03
Page 2

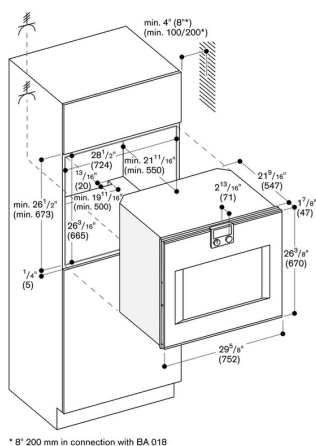

\* 8" 200 mm in connection with BA 018