

SPECS / DIMENSIONS



PRG366EG 36" PRO GRAND® ALL-GAS SELF-CLEANING RANGE WITH 6 STAR® BURNERS (2 W/ EXTRALOW®)

PRINT

APPEARANCE

Oven Cavity (Cubic Feet)	5.1
Number of Sealed Star® Burners	6

CONVENIENCE

Rack Positions	5
Number of Racks	3
Factory L.P. Units	✓

GENERAL INFORMATION

Approximate Shipping Weight - LBS.	463
Maximum BTU/HR. †	103,000
12" Low Back Guard Model Number*	LB36R
9" Back Guard Model Number*	N/A
3-5/8" Trim Model Number*	IT36R
22" High Back Shelf Model Number*	HS36R

TECHNICAL INFORMATION


120 Volts, 3 Prong Plug, 60 HZ, Single Phase A. C.	✓
AMPS	15

DIMENSIONS (INCHES)

Overall Dimensions - A	35-7/8" to 36-3/4"
Overall Dimensions - B	35-7/8"
Overall Dimensions - C	29-1/2"
Overall Dimensions - CC	32-5/8"
Overall Dimensions - CCC	27-1/8"
Overall Dimensions - D	47-3/8"
Cutout Dimensions - E	35-7/8" to 36-3/4" **
Cutout Dimensions - F	36" **
Cutout Dimensions - G	24" to 28-3/8" **
Cubic Feet	5.1'
Interior Oven Dimensions	28 x 16-1/4" x 21-5/8"

Diagrams

Thermador Professional®
36" All-Gas Self-Cleaning Range Cutout
& 36" Dual-Fuel Range Cutout

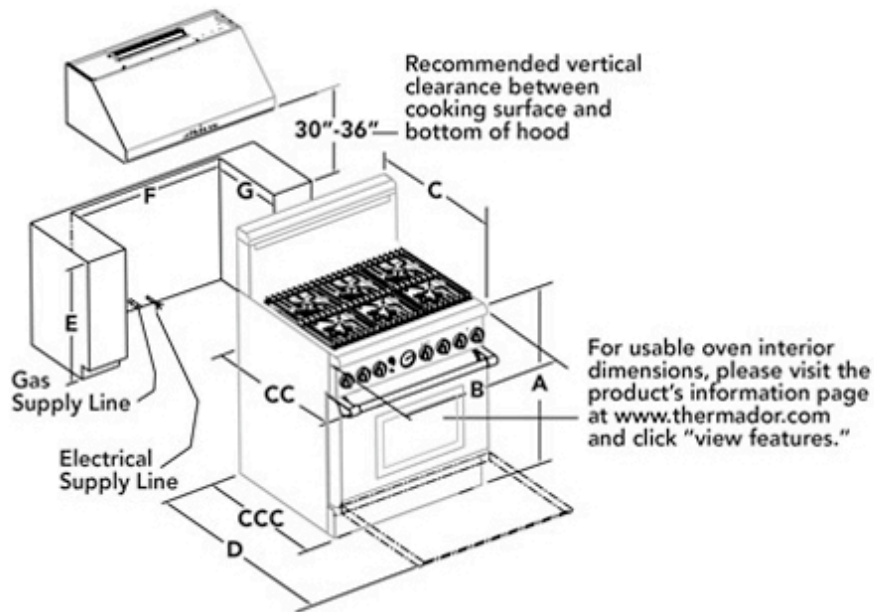

Click Here to View Features

LP Converter orifices - PRD ranges order (PLPKIT). All Gas ranges are factory (NG) Natural Gas. Factory (LP) Liquid Propane ordered separately.

Notes: 1) All height, width and depth dimensions are shown in inches. 2) Oven doors should be removed for doorway clearance. *You must install your professional range with one of the back guards listed above. They are ordered separately--except for the 30" range, which comes standard with a 9" back guard. **Please refer to installation instructions prior to making cutout. Approved for residential use only. †BTU/Hr. includes surface burners and the oven when applicable.

Ranges and cooktops are CGA and AGA approved.

PRINT

CLOSE

EMAIL