


PRODUCT SPECIFICATIONS



BI1215 • 15" Crescent Ice Maker • 1000 Series

FEATURES & BENEFITS

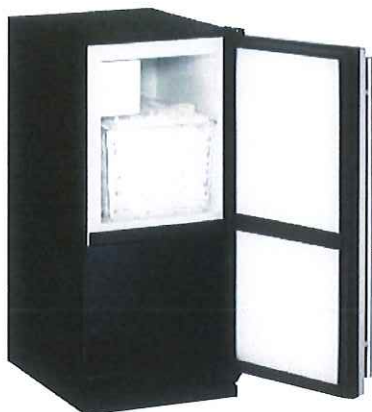

STAINLESS
SOLID



INTEGRATED
SOLID



BLACK
SOLID



WHITE
SOLID

PERFORMANCE

- Uses less than 3 gallons of water to produce up to 25 lbs of ice per day
- Up to 25 lbs in ice storage capacity
- Daily ice production rate is approx. 4 times greater than the average household refrigerator
- Crescent ice cube dimensions: 1/2" W x 3/4" H x 2 1/4" L
- On/Off switch is conveniently located on lower face of unit

INTERIOR/EXTERIOR

- No drain required
- Standard commercial stainless steel handle is interchangeable with professional handle accessory
- Door swing is field reversible, and is shipped right-hand hinged

INTEGRATION

- Unit is designed to be built-in or can be freestanding
- Integrated model requires 3/4" custom door panel (panels not supplied by U-Line)
- Four independently adjustable leveling legs provide a precise undercounter fit
- Available in the following finishes: Stainless, Integrated, Black, or White

MODEL DETAILS

| Model | Voltage/Hz | Door Swing | Finish | Shipping Weight |
|-----------------|------------|------------------|------------------|-----------------|
| U-BI1215S-00B | 115 / 60 | Field Reversible | Stainless Solid | 89 lb |
| U-BI1215INT-00B | 115 / 60 | Field Reversible | Integrated Solid | 89 lb |
| U-BI1215B-00B | 115 / 60 | Field Reversible | Black Solid | 89 lb |
| U-BI1215W-00B | 115 / 60 | Field Reversible | White Solid | 89 lb |


ACCESSORIES

| Model | Description | Finish | Shipping Weight |
|-------------|---|-----------|-----------------|
| 80-54247-00 | Professional Door Handle, 1 1/4" Diameter | Stainless | 2 lb |
| 80-54674-00 | Braided water supply line kit | N/A | 2 lb |


1000 Series • 15" Crescent Ice Maker • BI1215

DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with 3/4" integrated panel/frame installed.

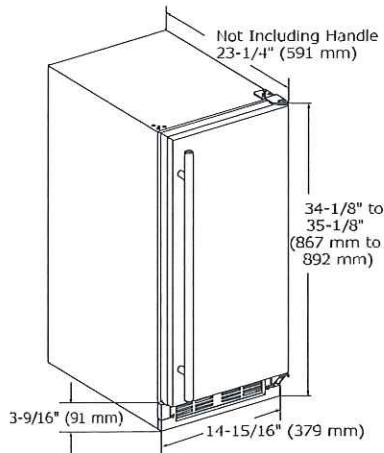

CABINET CUT-OUT

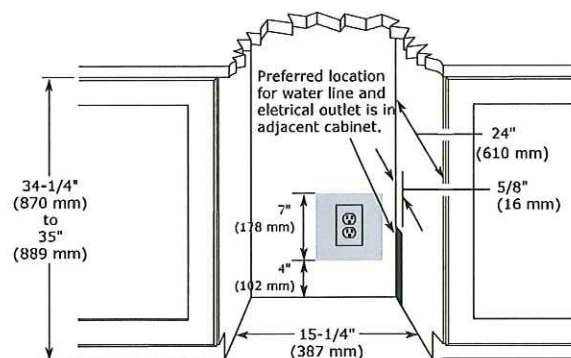

INSTALLATION NOTES

When installing adjacent to wall, ensure 2 1/2" clearance on hinged side for 90° door opening, allowing ample room for door handle.

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

SPECIFICATIONS

| | |
|-----------------------------------|--------------------|
| Model | BI1215 |
| Amps: Running | 2.5 |
| Control Type | On/Off Switch |
| Defrost Type | Manual |
| Dimensions: Product Depth | 23 1/4" / 591 mm |
| Dimensions: Product Height | 34 1/8" / 867 mm |
| Dimensions: Product Width | 14 15/16" / 379 mm |
| Energy Consumption: Avg. Per Year | N/A |
| ENERGY STAR | N/A |
| Ice Production Per Day | 25 lb |
| Ice Storage | 25 lb |
| Panel Height | 30 1/4" / 768 mm |
| Panel Thickness | 3/4" / 20 mm |
| Panel Type | Solid Panel |
| Panel Width | 14 3/4" / 375 mm |
| Product Weight: Max | 83 lb |
| Refrigerant Type | R134a |
| Sabbath (Star K Certified) | No |

ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).



Warranty

Please visit U-Line.com to view this model's User Guide. All specifications are subject to change without notice.

PRODUCT SPECIFICATIONS



1215WC • 15" Wine Captain® Model • 1000 Series



STAINLESS
FRAME



INTEGRATED
FRAME



INTEGRATED
SOLID



BLACK
FRAME

FEATURES & BENEFITS

| | |
|-------------|---|
| PERFORMANCE | <ul style="list-style-type: none"> Volume of 2.9 cu ft holds up to 24 wine bottles (750 ml) Digital Touch Pad Control is conveniently located on upper face of unit Temperature range: 38°F - 65°F Passive cooling system Rubber mounted compressor virtually eliminates vibration Exceeds 2019 energy standard by 33% (Tested according to 2019 Department of Energy - standard 10 C.F.R. section 430.23) |
| | <ul style="list-style-type: none"> Black interior is illuminated with LED lighting that automatically turns off when the door is closed, or can be set to stay on for 3 hours Three-quarter extension black coated wine racks with natural beech wood fronts allow for easy access and prevent bottles from shifting Wine racks accommodate a variety of bottle shapes and sizes, while fourth and fifth racks allow for larger diameter wine and champagne bottles LowE coated, argon gas filled, dual thermopane glass door provides protection from harmful UV Light Standard commercial stainless steel handle is interchangeable with professional handle accessory Door swing is field reversible, and is shipped right-hand hinged |
| | <ul style="list-style-type: none"> Unit is designed to be built-in or can be freestanding Solid natural beech wood fronts on wine racks can easily be stained to match surrounding cabinetry Integrated model requires ¾" custom door panel (panels not supplied by U-Line) Four independently adjustable leveling legs provide a precise undercounter fit Available in the following finishes: Stainless, Integrated, or Black |

MODEL DETAILS

| Model | Voltage/Hz | Door Swing | Finish | Shipping Weight |
|-----------------|------------|------------------|------------------|-----------------|
| U-1215WCS-00B | 115 / 60 | Field Reversible | Stainless Frame | 102 lb |
| U-1215WCINT-00B | 115 / 60 | Field Reversible | Integrated Frame | 99 lb |
| U-1215WCINT-60A | 115 / 60 | Field Reversible | Integrated Solid | 95 lb |
| U-1215WCB-00B | 115 / 60 | Field Reversible | Black Frame | 102 lb |


ACCESSORIES

| Model | Description | Finish | Shipping Weight |
|-------------|---|-----------|-----------------|
| 80-54247-00 | Professional Door Handle, 1 ¼" Diameter | Stainless | 2 lb |


1000 Series • 15" Wine Captain® Model • 1215WC

DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with 3/4" integrated panel/frame installed.

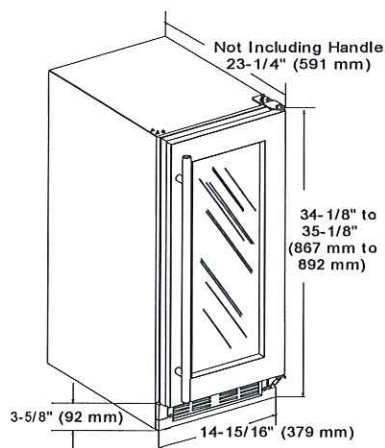

CABINET CUT-OUT

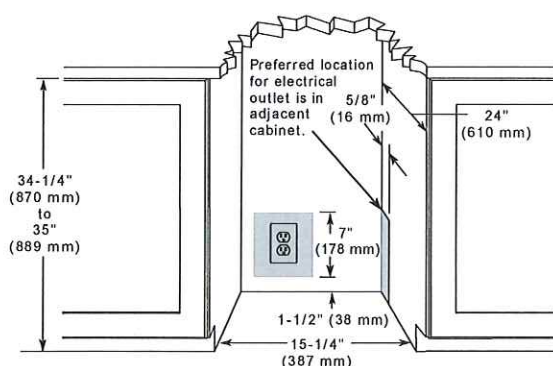

INSTALLATION NOTES

When installing adjacent to wall, ensure 2 1/2" clearance on hinged side for 90° door opening

Cutout includes the additional 1/4" width overall to ensure proper installation.

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

SPECIFICATIONS

| | |
|-----------------------------------|--|
| Model | 1215WC |
| Amps: Running | 1.2 |
| Capacity: Volume (cu ft) | 2.9 |
| Capacity: Wine Bottle (750 ml) | 24 |
| Control Type | Digital Touch Pad |
| Dimensions: Product Depth | 23 1/4" / 591 mm |
| Dimensions: Product Height | 34 1/8" / 867 mm |
| Dimensions: Product Width | 14 15/16" / 379 mm |
| Energy Consumption: Avg. Per Year | 120 kWh |
| ENERGY STAR | N/A |
| Panel Height | 30 1/4" / 768 mm |
| Panel Thickness | 3/4" / 20 mm |
| Panel Type | 2 3/4" / 70 mm Frame Panel or Solid Panel (-60 suffix) |
| Panel Width | 14 3/4" / 375 mm |
| Product Weight: Max | 95 lb |
| Refrigerant Type | R600a |
| Sabbath (Star K Certified) | Yes |
| Temperature Range | 38°F - 65°F |

COOLING SYSTEM



ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).



Warranty

Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.