


TWI180 WP, TWF160 WP, TWB120 WP



0



-----

. Taning

\_



SPECIFICATIONS	
Unit Width	231/2" (596 mm)
Unit Height	331/2" - 343/4" (850 - 882 mm)
Unit Depth- Excluding Door Dimension	23 <sup>5</sup> /s" (600 mm)
Unit Depth- Including Door Dimension	25 <sup>5</sup> / <sub>16</sub> " (643 mm)
Door Clearance	18 <sup>1</sup> / <sub>4</sub> " (463 mm)
Built-In	
Minimum Cabinet Opening Width	23 <sup>5</sup> /8" (600 mm)
Minimum Cabinet Opening Height	331/2" (850 mm)
Interior Volume	
Drum Volume	4.1 (116 l)
Rated Load Capacity	17.6 lbs (8 kg)
Plumbing	
Drain Hose	5' 3" (1.6 m) flexible drain hose is supplied. May be extended up to 13' (4 m) Delivery head must not exceed 5' (1.5 m)
Electrical	
Electrical Requirements	120V, 60Hz, 15A 220V, 30A, 60Hz (Used with NEMA Adapter)
Power Cord	NEMA 5-15 plug, 6'7" ft (2 m)
Shipping	
Shipping Weight	145 lbs (66 kg)
Shipping Dimensions	26" W x 37" H x 27 ³/16"D
Support	
Call Miele	(800) 999-1360
Miele Website	~∂www.mieleusa.com
20/20 Link	√ີ∂2020technologies.com



TWI 180 WP Item# 12WI1802USA

#### Installation Accessories:



WTV 502 Stacking kit



WTV 512 Stacking kit with drawer



witelio



TWB 120 WP Item# 12WB1202USA




WTS 510 Stacking kit with drawer




NEMA Adapter NEMA 14-30/2x5-15 Adapter




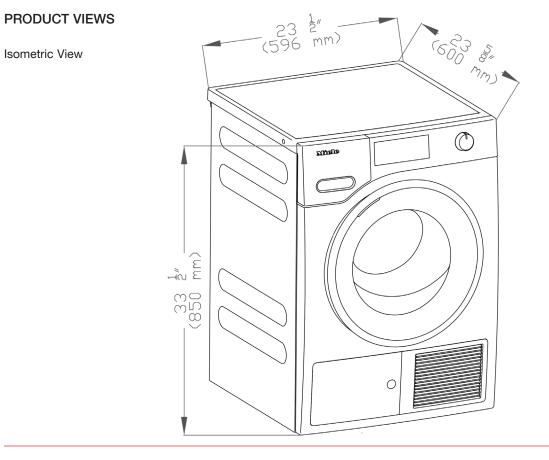

Front View

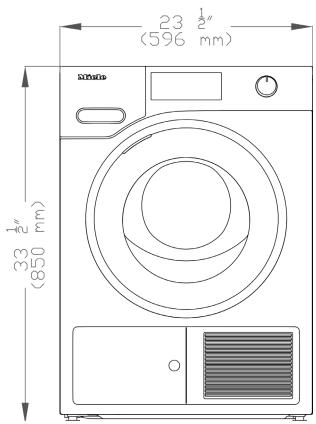




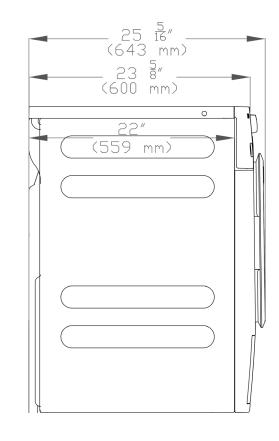

PRODUCT VIEWS

Side View




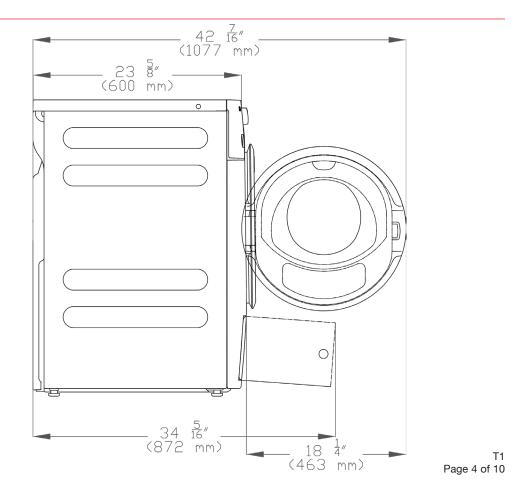




#### **PRODUCT VIEWS**

Door Swing

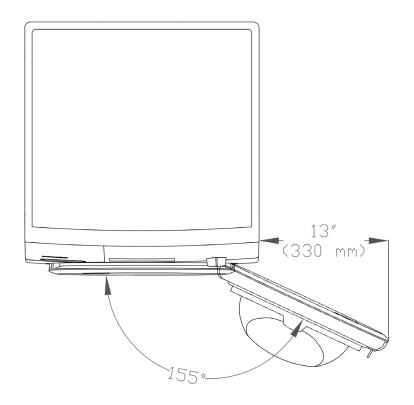


Rear View






#### **Built-in Niche**

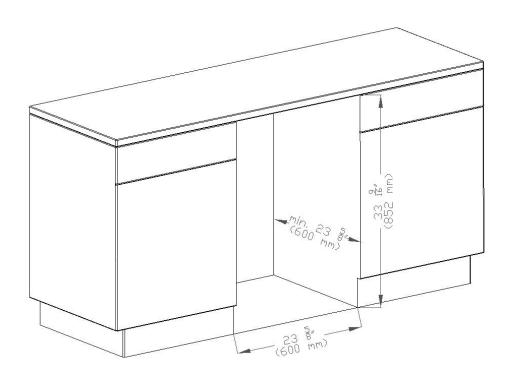




#### Stacked in Closet

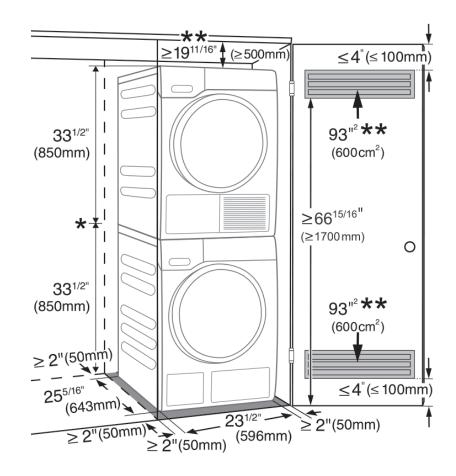

- ★ Height with Stacking Kit
  WTV502 = 67<sup>3/8"</sup> (1711 mm)
  WTV512 = 71<sup>1/8"</sup> (1806 mm)
- **\*\*** If it is not possible to fulfill the dimension specification you may have longer drying and process time.



Stacking Kit WTV 502 (Optional Accessory)

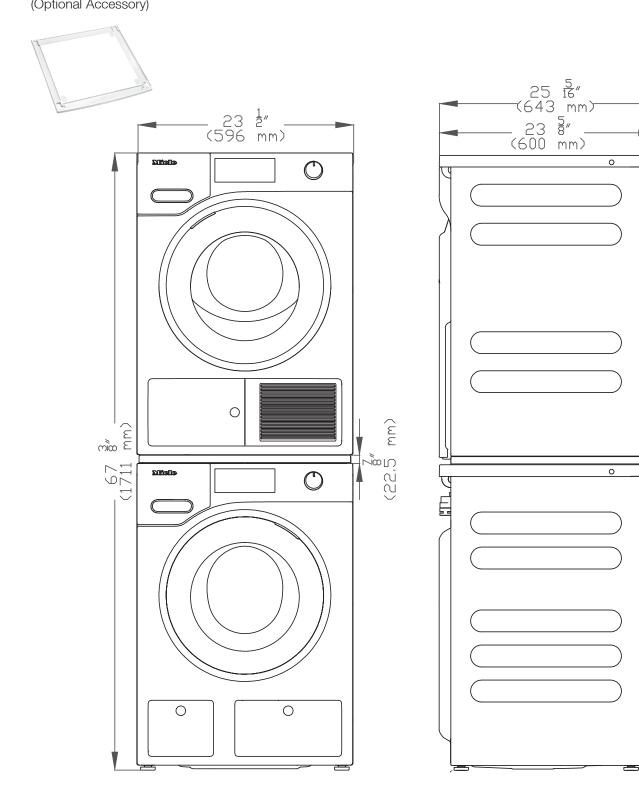



# Stacking Kit With Drawer WTV 512 (Optional Accessory)

