DWHD650WFP EMERALD® 6-PROGRAM DISHWASHER PROFESSIONAL SERIES HANDLE





Also Available In:

DWHD650WFM – Flat Stainless Steel Panel with Masterpiece® Series Handle

DWHD650WPR – Custom Panel

FEATURES & BENEFITS

- Chef's Tool Drawer (3rd Rack) is designed to make loading and unloading tools and hard to place items extraordinarily easier
 Sens-A-Wash[®] measures water cleanliness and adjusts wash
- cycle - Three stage advanced filtration recirculates water for sparkling results
- 3-Level adjustable upper rack is customizable for all of your needs, designed to be raised for extra large items placed on the bottom rack, or lowered to fit taller wine glasses on the upper rack
- Extra Dry Option adds extra heat to the final rinse to enhance drying results
- Impressively Quiet®—48 dBA for peaceful kitchen experience
- Thermador Connected Experience by Home Connect brings exclusive dish features that keep you connected. Always.

ACCESSORIES (OPTIONAL)		
SGZ1010UC		
SMZ5000		
SMZ5002UC		
SMZPCJB1UC		





Accessory Kit includes Extra-Tall-Item Sprinkler, Vase / Bottle Holder, 3 Plastic Item Clips and Small Item Basket

-	
S	ilverware
C	Carafe

GENERAL PROPERTIES	,
Number Of Wash Cycles	6
Number Of Options	5
dBA	48
Third Rack	Chef's Tool Drawer®
Rack Adjustability	Rackmatic 3-Stage
Tub Material	Stainless Steel
Control Type	Touch Control
Concealed Water Heating Element	Yes
Leak Protection System	24/7 AquaStop®
Water Softener	No
Five-Level Wash	Yes
Childlock	No
Home Connect (Wi-Fi Enabled)	Yes
EFFICIENCY	·
Water Usage Per Cycle (g)	3.5 g
Energy Efficiency Class	Tier 1
ENERGY STAR [®] Certified	Yes
Total Annual Energy Consumption (kWh)	269 kWh
Total Annual Water Consumption (g)	624 g
CAPACITY	_
Number Of Place Settings	16
TECHNICAL DETAILS	
Watts (W)	1,440 W
	1,440 W 12 A
Current (A)	
Current (A) Volts (V)	12 A
Current (A) Volts (V) Frequency (Hz)	12 A 120 V 60 Hz
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit	12 A 120 V
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in)	12 A 120 V 60 Hz 67 " Left - 45"
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)*	12 A 120 V 60 Hz 67" Left - 45" Right - 56"
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)* Minimum Water Pressure (Ib/sin)	12 A 120 V 60 Hz 67" Left - 45" Right - 56" 14
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)* Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake	12 A 120 V 60 Hz 67" Left - 45" Right - 56" 14 140° F
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)* Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in)	12 A 120 V 60 Hz 67" Left - 45" Right - 56" 14 140° F N/A
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)* Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Inlet Hose (in)	12 A 120 V 60 Hz 67" Left - 45" Right - 56" 14 140° F N/A
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)* Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in) DIMENSIONS & WEIGHT	12 A 12 V 60 Hz 67" Left - 45" Right - 56" 14 140° F N/A 79" 33 7/8" × 23 9/16" ×
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)* Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in)	12 A 12 V 60 Hz 67 " Left - 45 " Right - 56 " 14 140° F N/A 79 " 33 7/8" × 23 9/16" × 23 3/4" 33 7/8" Min. × 23 5/8"
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)* Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (HxWxD) (in)	12 A 12 V 60 Hz 67 " Left - 45 " Right - 56 " 14 140° F N/A 79 " 33 7/8" × 23 9/16" × 23 3/4" 33 7/8" Min. × 23 5/8" Min. × 24 "

*September 2020 running production change to remove adhesive routing clips for power cord. These clips and the edge protector are now included in the dishwasher accessory kit #SMZEPCC1UC.


DWHD650WFP **EMERALD® 6-PROGRAM DISHWASHER**



PROFESSIONAL SERIES HANDLE

WARRANTY		
Limited Warranty, Entire Appliance, Parts and Labor	2 Year	
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only	3rd to 5th Year	
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year	
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime	

DISHWASHER & CUTOUT DIMENSIONS

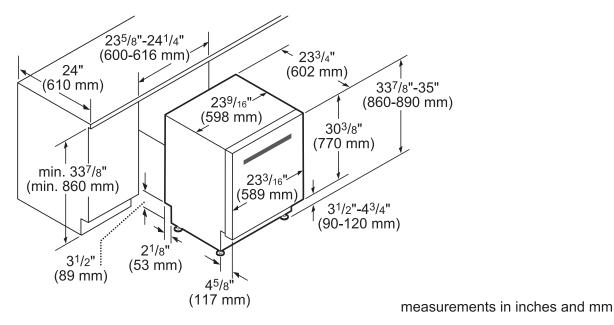

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.