

DF486G



## FEATURES

- 6 dual-stacked burners plus 15,000 Btu infrared griddle
- Dual-stacked burners produce up to 20,000 Btu
- Burners capable of delivering less than 300 Btu for premier simmer performance
- 10 cooking modes make meals easy
- Dual convection oven for faster, more consistent cooking
- Second 18" single convection oven
- Temperature probe lets you know when it's done
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Continuous cast-iron grates for easy movement of pots and pans
- Cobalt blue porcelain interior
- Spark ignition system re-ignites if flame goes out
- Heavy-gauge stainless steel
- Exclusive pivoting control panel
- Red, black or stainless steel control knobs
- Self clean, delayed start, timed cook, Sabbath mode and more

## ACCESSORIES

- 11" Cutting Board
- 30" Bake Stone Kit
- 30" Full-Extension Oven Rack
- Broiler Pan
- Dehydration Kit
- Oven Rack Set (3)
- Premier Baking Sheet
- Temperature Probe
- 5" and 10" stainless steel risers, and 20" riser with shelf
- Signature red, black or stainless steel control knobs
- Front Leg Extension Covers
- Cast iron S-grates and wok grate
- Hardwood cutting board
- High altitude conversion kit
- Stainless steel, brass or chrome bezels


Accessories available through an authorized Sub-Zero dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



## KNOB OPTIONS



## TOP CONFIGURATION

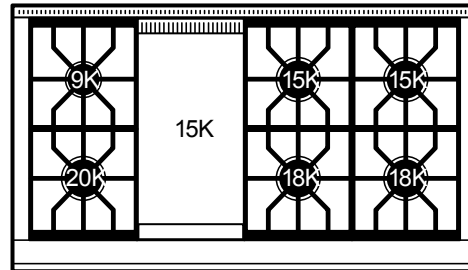


## RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 2 - 15,000 Btu Burners
- 2 - 18,000 Btu Burners
- 1 - 20,000 Btu Burner
- 1 - 15,000 Btu (14,000 Btu LP) Griddle

**PRODUCT SPECIFICATIONS**


Model	DF486G
Dimensions	47 7/8"W x 36 7/8"H x 29 1/2"D
Oven 1 Usable Capacity	1.5 cu. ft.
Oven 1 Overall Capacity	2.5 cu. ft.
Oven 2 Usable Capacity	2.8 cu. ft.
Oven 2 Overall Capacity	4.5 cu. ft.
Door Clearance	19 1/2"
Weight	750 lbs
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	50 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female

**DIMENSIONS**

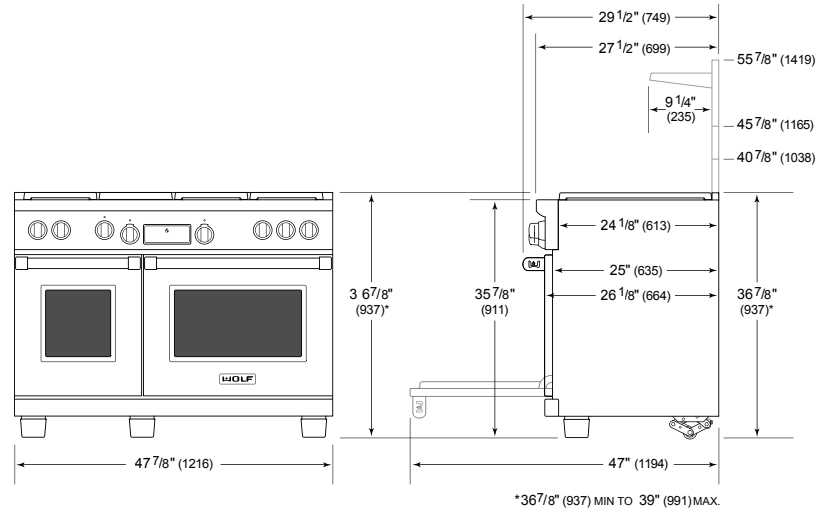

**ELECTRICAL**


**GAS**

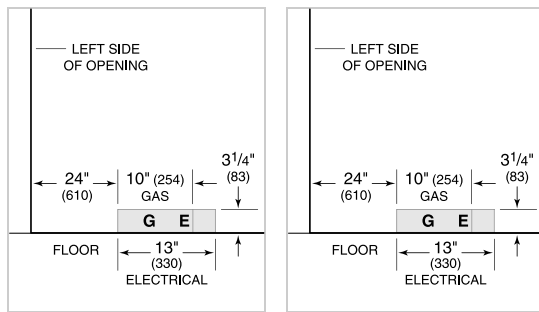

**NOTE:**

Dimensions in parenthesis are in millimeters unless otherwise specified

**STANDARD INSTALLATION**

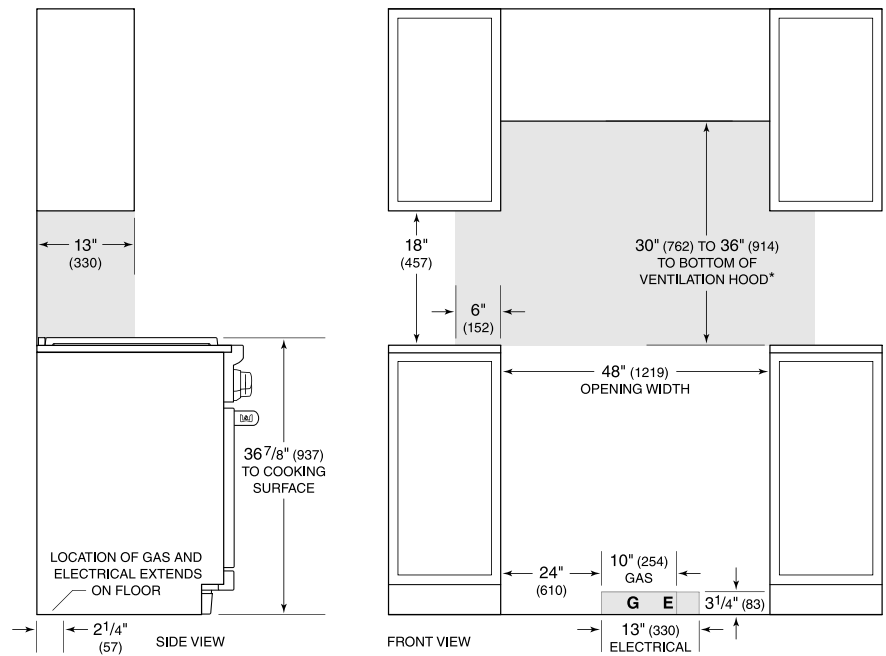

\*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (118) for charbroiler.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.