

Now available with our exclusive ACT™ technology, Monsoon II delivers and then more. Starting with recognized conventional installation dimensions, Monsoon II fits into any custom cabinetry or enclosure. Its stainless

steel baffle filters with removable grease tray make it easy to maintain its pro-style look while the 6-speed electronic controls and wireless remote control give the homeowner more than they expected.


ACT™

	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
Min. - Max. CFM	450 - 1,200	350 - 590	350 - 390
Min. - Max. Sones	3.5 - 9	3.3 - 6	3.3 - 4


\*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.




Includes Wireless Remote Control

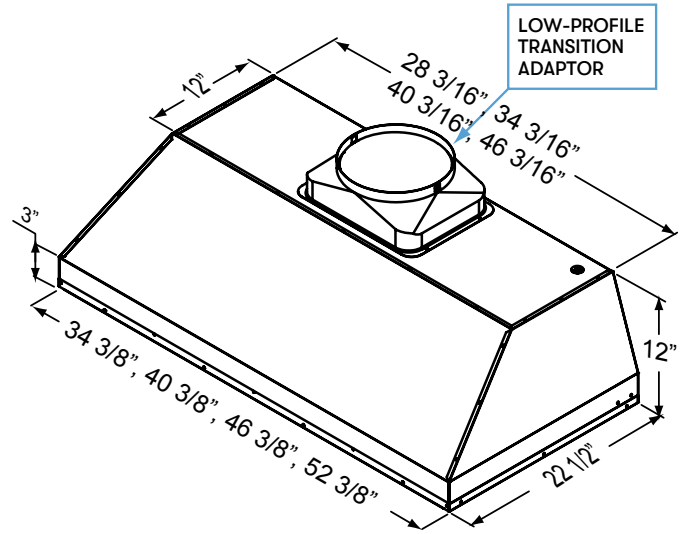

FRONT

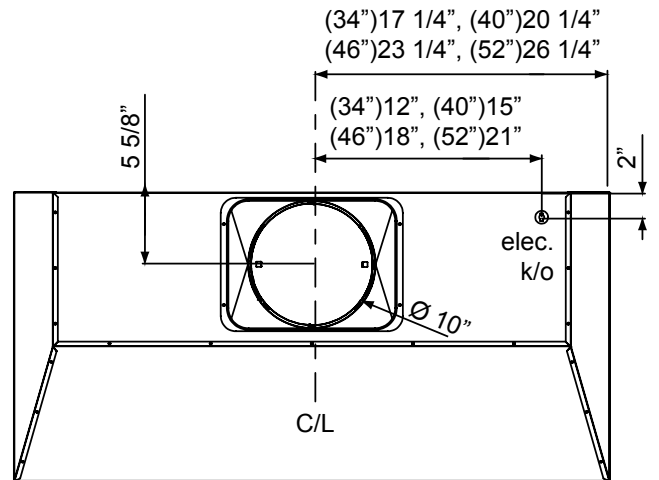

TOP

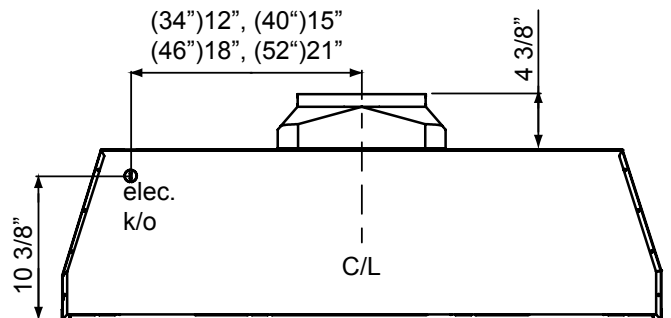

BACK

MODEL	AK9334AS	AK9340AS	AK9346AS	AK9352AS
Stainless Steel				
<b>Size</b>	36" (34-3/8" x 22-1/2")	42" (40-3/8" x 22-1/2")	48" (46-3/8" x 22-1/2")	54" (52-3/8" x 22-1/2")
<b>Blower CFM (Min. - Max.)</b>	450 - 1,200	450 - 1,200	450 - 1,200	450 - 1,200
<b>Sones (Min. - Max.)</b>	3.5 - 9	3.5 - 9	3.5 - 9	3.5 - 9
<b>ACT 590 CFM (Min. - Max.)</b>	350 - 590	350 - 590	350 - 590	350 - 590
<b>ACT 590 Sones (Min. - Max.)</b>	3.3 - 6	3.3 - 6	3.3 - 6	3.3 - 6
<b>ACT 390 CFM (Min. - Max.)</b>	350 - 390	350 - 390	350 - 390	350 - 390
<b>ACT 390 Sones (Min. - Max.)</b>	3.3 - 4	3.3 - 4	3.3 - 4	3.3 - 4
<b>FEATURES</b>				
<b>ACT™ Technology</b>	Yes	Yes	Yes	Yes
<b>Controls</b>	Electronic Touch	Electronic Touch	Electronic Touch	Electronic Touch
<b>Speed Levels</b>	6*	6*	6*	6*
<b>Auto Delay-Off</b>	Yes	Yes	Yes	Yes
<b>Clean Air Mode</b>	Yes	Yes	Yes	Yes
<b>Lighting</b>	Halogen, 35W x2	Halogen, 35W x2	Halogen, 35W x4	Halogen, 35W x4
<b>Dual-Level Lighting</b>	Yes	Yes	Yes	Yes
<b>Filters</b>	Pro Baffle x3	Pro Baffle x3	Pro Baffle x4	Pro Baffle x4
<b>Removable Grease Tray</b>	Yes	Yes	Yes	Yes
<b>Wireless Remote Control</b>	Yes	Yes	Yes	Yes
<b>Recirculating Option</b>	No	No	No	No
<b>ADA Compliant</b>	Yes	Yes	Yes	Yes
<b>DUCT SPECIFICATIONS</b>				
<b>Vertical Internal Blower</b>	10" Round	10" Round	10" Round	10" Round
<b>Horizontal Internal Blower</b>	NA	NA	NA	NA
<b>AC POWER</b>	120V, 60Hz at Max. 7A	120V, 60Hz at Max. 7A	120V, 60Hz at Max. 7A	120V, 60Hz at Max. 7A
<b>OPTIONAL ACCESSORIES</b>				
<b>Bloom™ GU10 LED</b>	ZOB0040	ZOB0040	ZOB0040	ZOB0040
<b>Make-Up Air Kit</b>	MUA010A	MUA010A	MUA010A	MUA010A
<b>MOUNTING HEIGHT RANGE**</b>	26" - 36"	26" - 36"	26" - 36"	26" - 36"
<b>WARRANTY</b>	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor

\*When ACT™ is enabled the maximum speed levels will change. ACT 590 CFM = 3 speeds and ACT 390 CFM = 2 speeds.

\*\*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

**ACT™** AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.  
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

MAR18.0201

